




宗申动力
ZONG SHEN POWER

Model: GB200	
BOM No 1T4JQJ200	
GB200	
GB200	
V01	
2018-12-26	


Appearance	Basic power parameters（ZONGSHEN fill in）	
	Displacement (cc)	196
	Cylinder Bore×stroke (mm)	68×54
	Oil quantity (cc)	400～600
	Recommended oil	10W-30
	Fuel tank effective volume (cc)	2600
	Starting System	Recoil
	Ambient temperature（℃）	5-40
	operation counts	≤3
	Idle speed (r/min)	3780±60
	Start idle (r/min)	1440±144
	Idle speed control	LITTLE SPRING
	rated power (kW/rpm)	4.2/3600
	Speed control power(kW/r)	3.9/3300
	Max torque (N・m/rpm)	11.5/2600
	Fuel type	92#
	Net weight（kg）	15.5
	Certification	CE+EC(V)
	Endurance time（h）	125
	Filter configuration	PAPER+FOAM
	adjust Speed type	Manual mechanical adjustment
	Choke control	manual
	Exhaust direction	Side
	Pulling direction	12 o'clock
	fuel switch	Y
	Flameout method	Manual Flameout Switch
	Oil alarm	Y
	PTO	14#
Charging coil	N	
Component special status confirmation	Y	
Application（s）	Tablet	
Terminal main parameters（customer fill in）		
Water pressure(psi)		

	Effluent flow (GPM)	
	Working speed (r/min)	
	Idle speed	
	start at idle speed	

Machine and side cover installation size

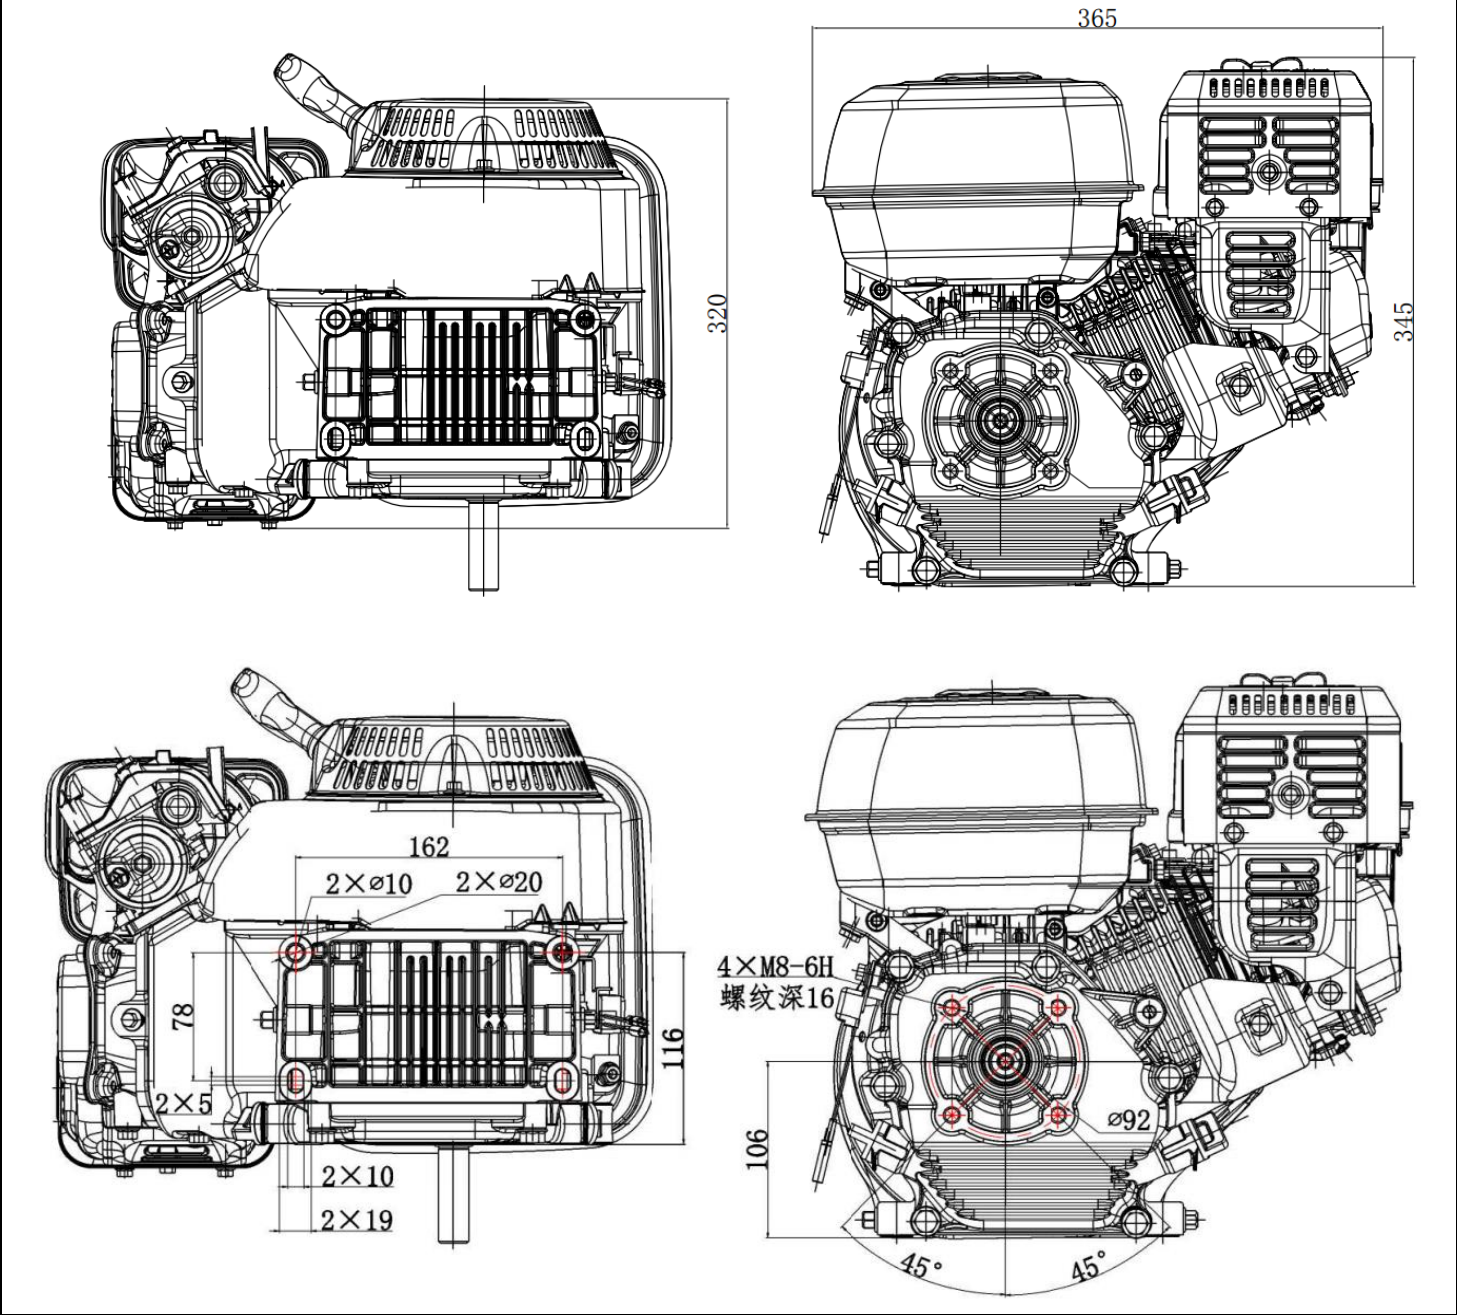

PTO output mounting size

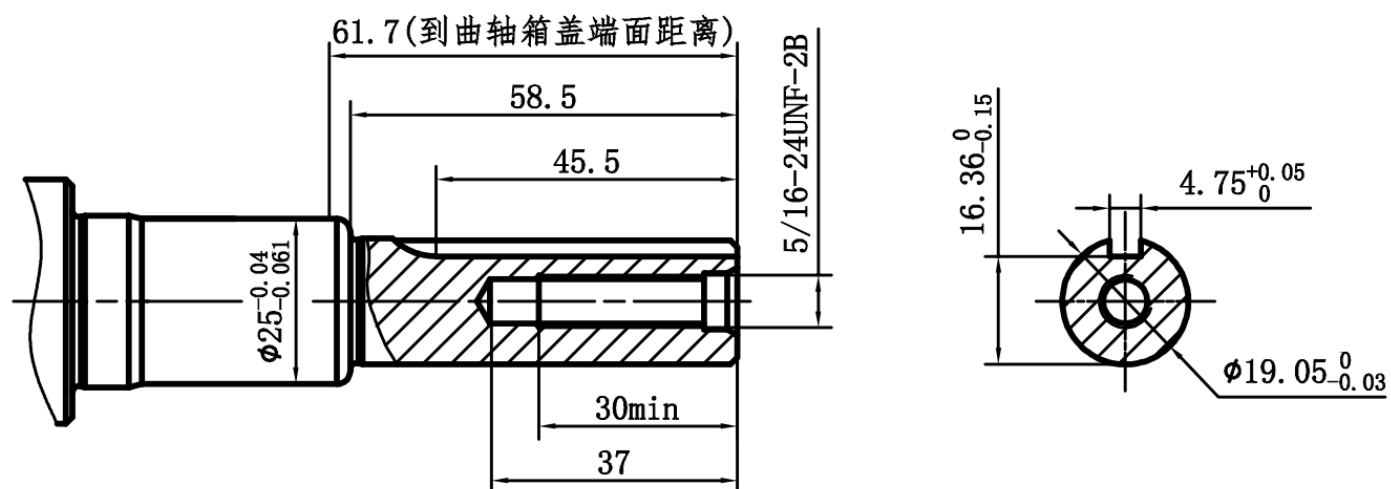

包装信息:

备注（客户其他特殊要求）:

- 1、
- 2、
- 3、