




宗申动力
ZONG SHEN POWER

GB225E
BOM No 1T4JQW25E
GB225E
GB225E
V012018-12-26


Appearance	Basic power parameters	
	Displacement (cc)	224
	Cylinder Bore×stroke (mm)	72×55
	Oil quantity (cc)	400~600
	Recommended oil	10W-30
	Fuel tank effective volume (cc)	2600
	Starting System	Recoil+12V E-start
	Ambient temperature (°C)	5-40
	operation counts	≤3
	idle speed (r/min)	3780±60
	Start idle (r/min)	1440±144
	Idle speed control	Little spring
	rated power (kW/rpm)	4.5/3600
	Speed control power(kW/r)	4.2/3200
	Max torque (N • m/rpm)	12.5/2600
	Fuel type	92#
	Net weight (kg)	18.7
	Certification	CE+EC(V)
	Endurance time (h)	125
	Filter configuration	PAPER+FOAM
	adjust Speed type	Manual machinery control
	Choke control	MANUAL CHOKE
	Exhaust direction	Front side
	Pulling direction	12'CLOCK
	Fuel switch	Y
	Flameout method	Manual Flameout switch
	Oil alarm	Y
	PTO	24#
	Charging coil	RECTIFYING 12V10W
	Component special status confirmation	T
	Application	WATER PUMP
Main parameters of the terminal (customer fill in)		
Water pressure (psi)		

	Effluent flow (GPM)	
	Working speed (r/min)	
	Idle speed	
	start at idle speed	

Machine and side cover installation size

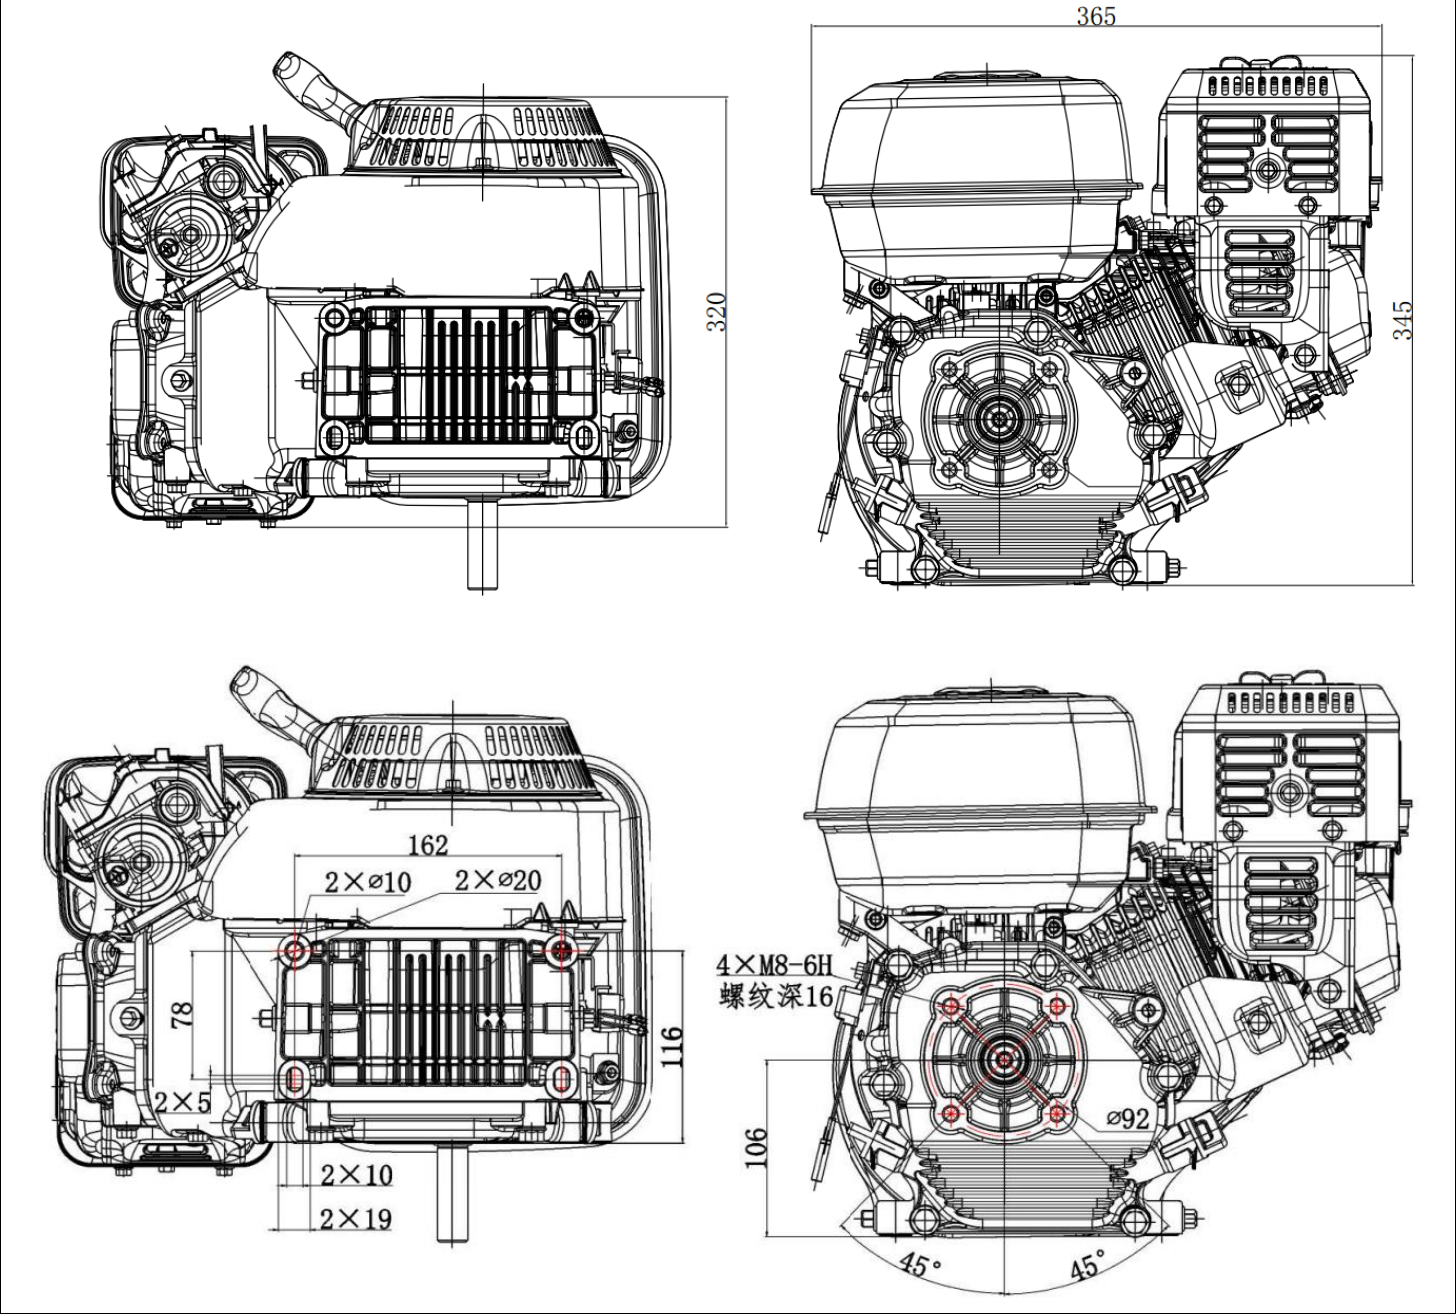

PTO output mounting size

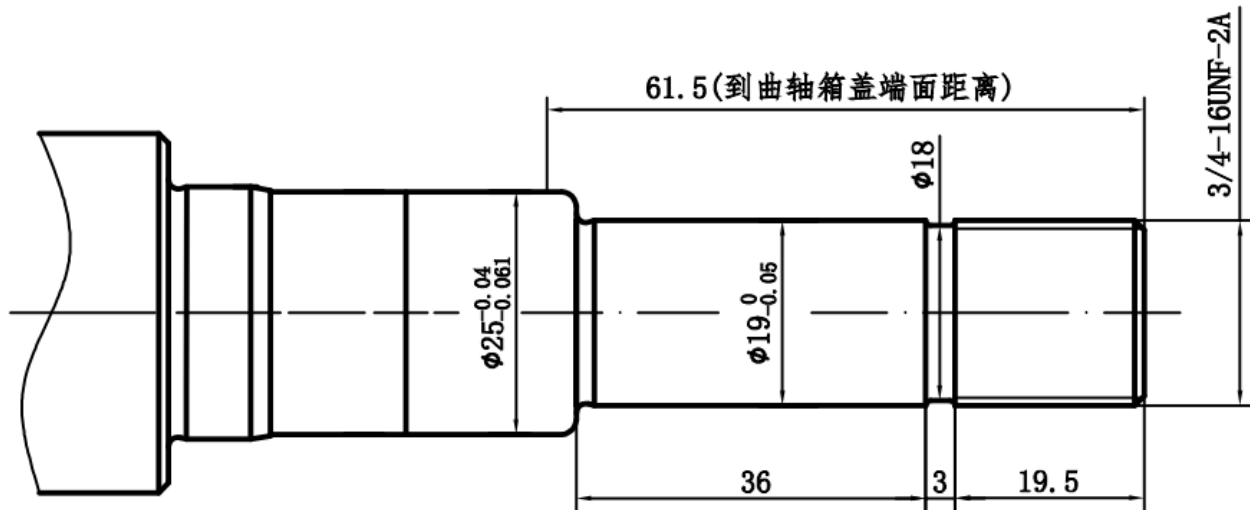

包装信息:

备注（客户其他特殊要求）:

- 1、
- 2、
- 3、