




宗申动力
ZONG SHEN POWER


GB270E	
BOM No: 1T4JQJ27E	
GB270E	
GB270E	
V01	
2018-12-26	
	N

Appearance	GB270E Engine Specifications	
	Displacement (cc)	272
	Bore × stroke (mm)	75×61.5
	Oil quantity (cc)	400~1000
	Recommended oil	10W-30
	Fuel tank volume (cc)	3100
	Starting System	Recoil+12V E-start
	Ambient temperature (°C)	5-40
	Operation counts	≤3
	Idle speed (r/min)	1400
	Start idle (r/min)	1400
	Idle speed control	Spring
	Rated power (kW/rpm)	5.8/3600
	Speed control power(kW/r)	5.2/3400
	Max torque (N • m/rpm)	15.5/3000
	Fuel type	92#
	Net weight (kg)	20
	Certification	EC(V)
	Endurance time (h)	500
	Filter configuration	PAPER+FOAM
	Adjust Speed type	Manual machinery control
	Choke control	Manual choke
	Exhaust direction	side
	Pulling direction	12'clock
	Fuel switch	Y
	Flameout method	Manual flameout switch
	Oil alarm	Y
	PTO	05#
	Charging coil	DC12V10W
	Component special status confirmation	Y
	Application	General purpose
	Terminal main parameters (customer fill in)	
	Water pressure (psi)	
	Effluent flow (GPM)	
	Working speed (r/min)	
	Idle speed	
	start at idle speed	


Machine and side cover installation size

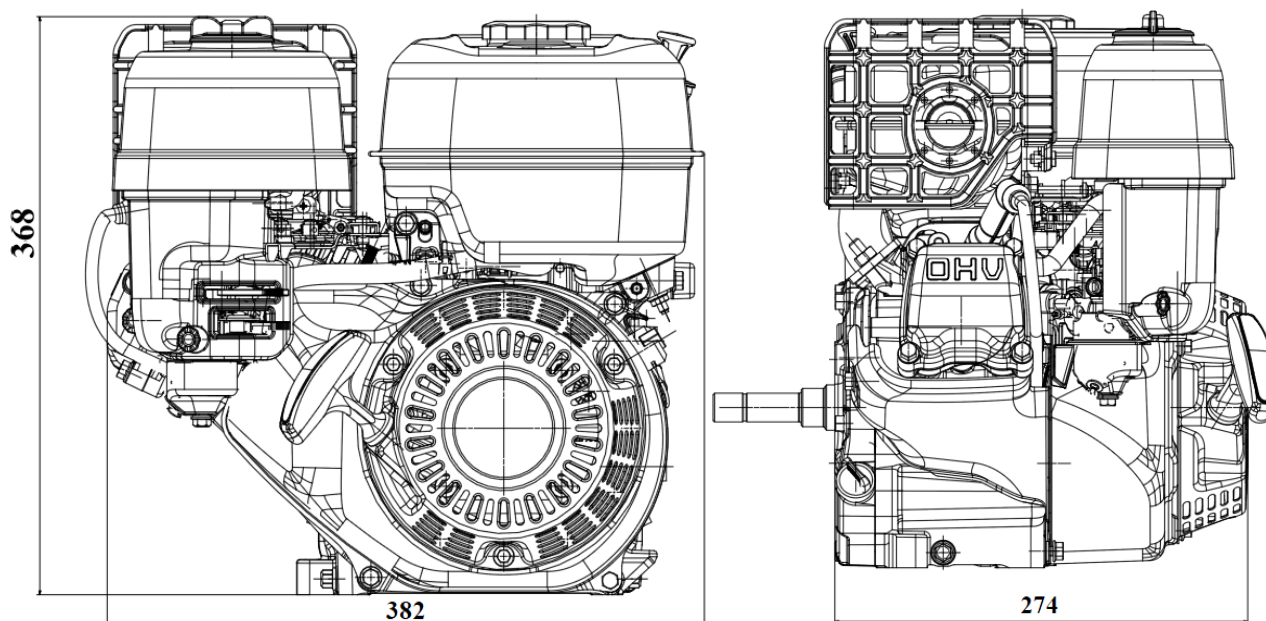

曲轴边盖安装尺寸

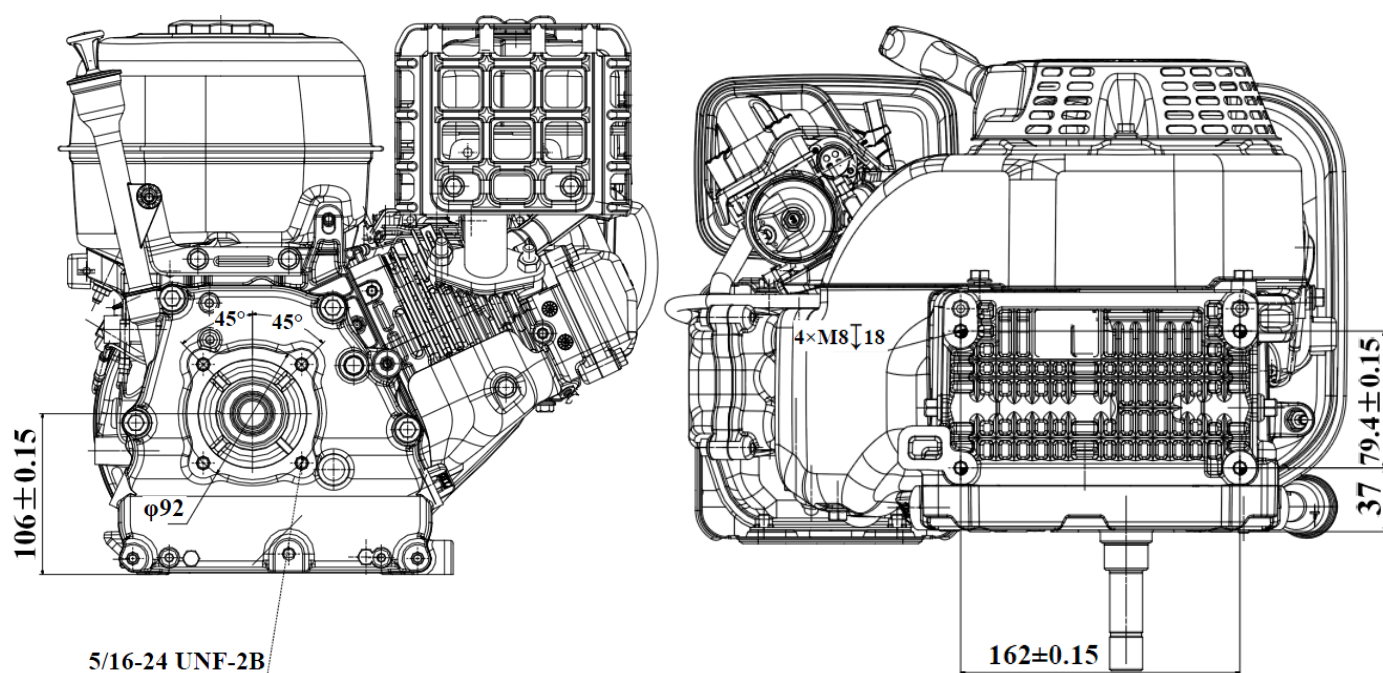

PTO output mounting size

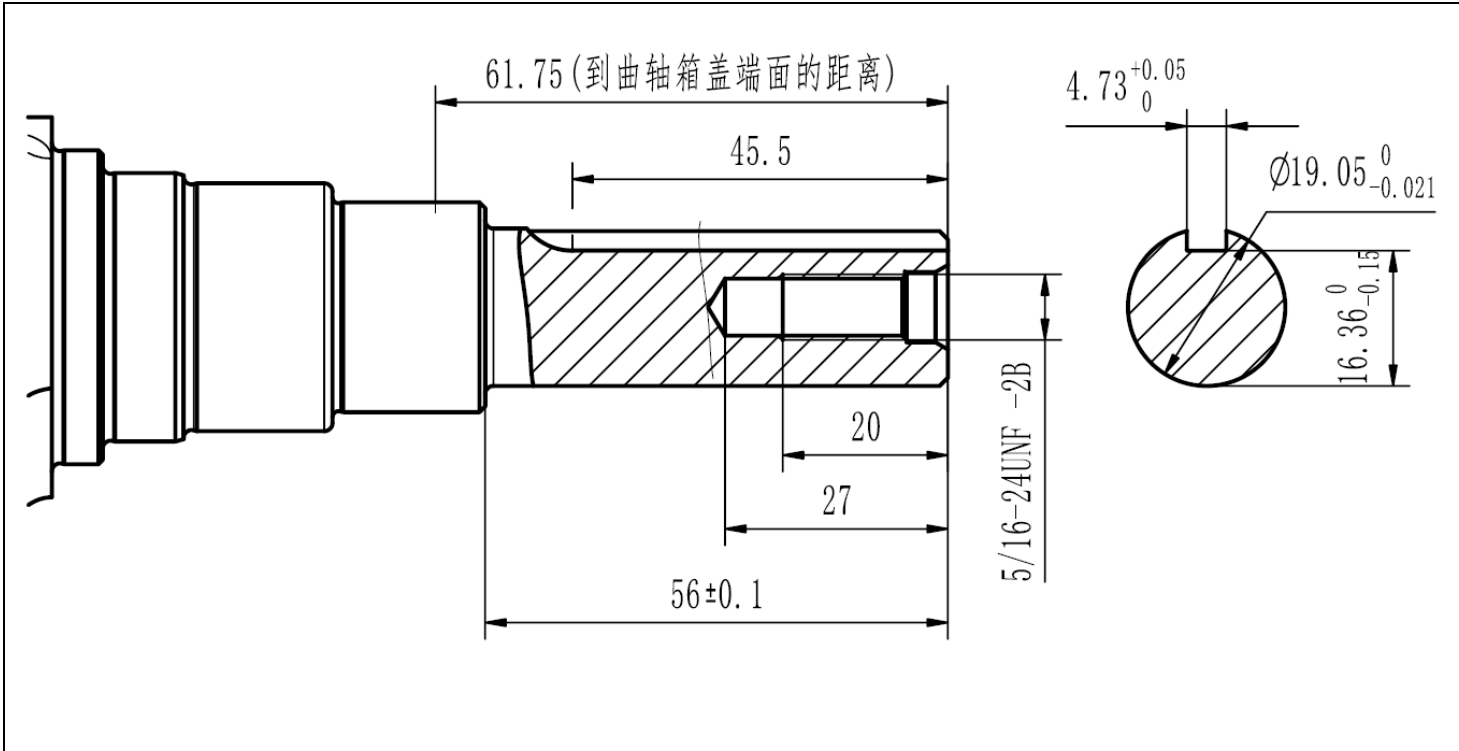

包装信息:	

备注 (客户其他特殊要求):

1、

2、

3、